
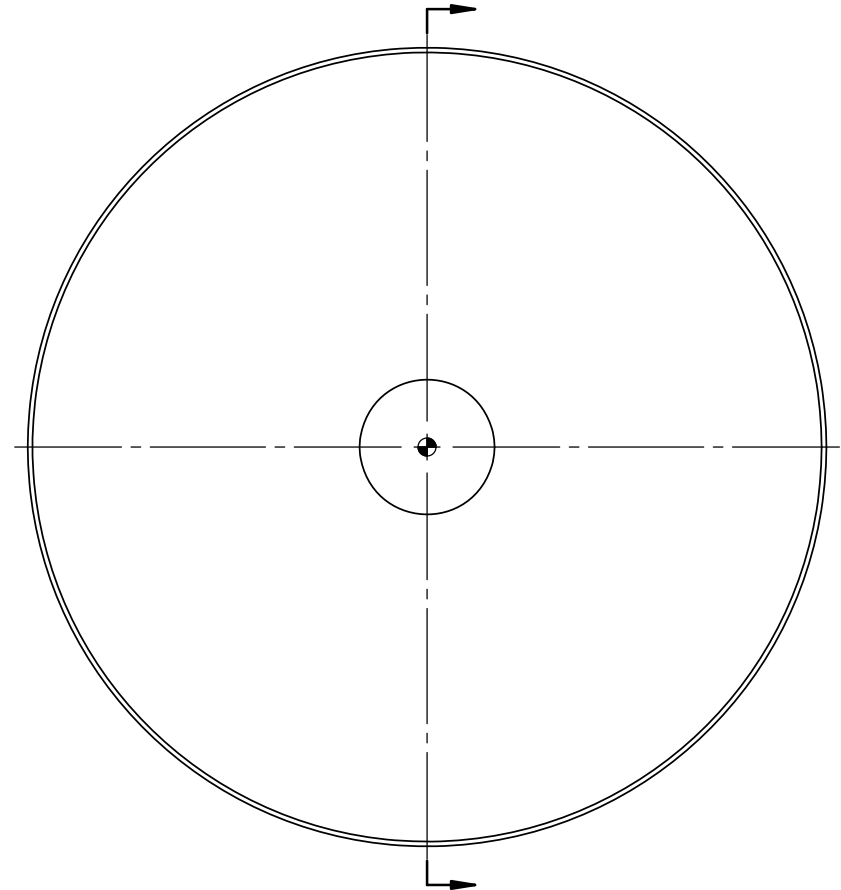


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
Ø	INITIAL SOLIDWORKS DRAWING RELEASE	05/11/12	JEH


NOTES: UNLESS OTHERWISE SPECIFIED

1. DEBURR SHARP EDGES .015 MAX.
2. CHAMFER ALL THREADS .01 PAST ROOT DIAMETER.

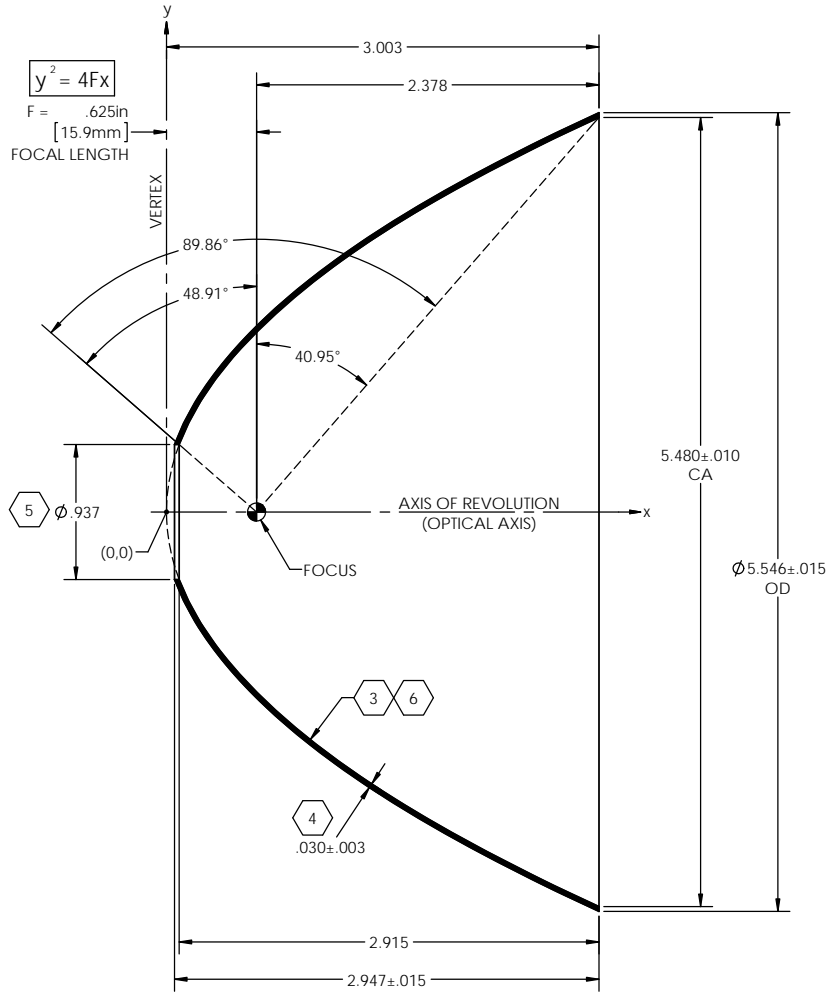

- 3 REFLECTOR TO BE REPLICATED FROM SPECIFIED MASTER TOOL EXHIBITING REQUIRED PARABOLIC GEOMETRY AND SPECULAR SURFACE FINISH OF 80-50 SCRATCH-DIG PER MIL-O-13830A.
- 4 NOMINAL THICKNESS (T) MAY VARY ±T/4 WITHIN .25 OF EDGES.
- 5 VERTEX HOLE OPENING IS THE PREFERRED REGISTRATION FEATURE FOR AXIAL ALIGNMENT OF REFLECTOR. PLANE OF CLEAR APERTURE NOT RECOMMENDED FOR THIS PURPOSE.
- 6 REFLECTIVE ENHANCEMENT SURFACE COATING TO BE SEPARATELY SPECIFIED.

CROSS REF: PB101  
REFLECTIVE SURFACE AREA: 0.2901 SQ. FT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CONTRACT NO.		 42310 WINCHESTER RD. TEMECULA, CA 92590 WWW.OPTIFORMS.COM	
FRACTIONS ± 1/16	DECIMALS ± .003 XXX ± .005	ANGLES ± 1/2°	APPROVALS		
MATERIAL ELECTROFORMED NICKEL - LSSN TYPE 1		DRAWN JEH		05/11/12	
FINISH NOTES 3,6		CHECKED			
NEXT ASSY		USED ON			
APPLICATION		-DO NOT SCALE DRAWING-		TNGR KMT 05/11/12 DESIGN ACTIVITY	
SIZE C	CAGE CODE 0Y1Y4	DWG. NO. P16-0100		REV Ø	
SCALE 1.5:1	CAD NO. P16	SHEET 1 OF 1			